


## Magnetic Stripe Card Encoder JBC Series

### Features

Operating temperature range	0-45 degree C
Operating humidity range	20%–90%RH
Storage temperature range	-20 to 50 degree C
Storage humidity range	5%–95%RH
Speed	10cm/s ~ 80cm/s
Credit card compatibility	IBM, ISO, DIN, ANSI standards
Power supply	DC+5V
Electrical current	≤150mA

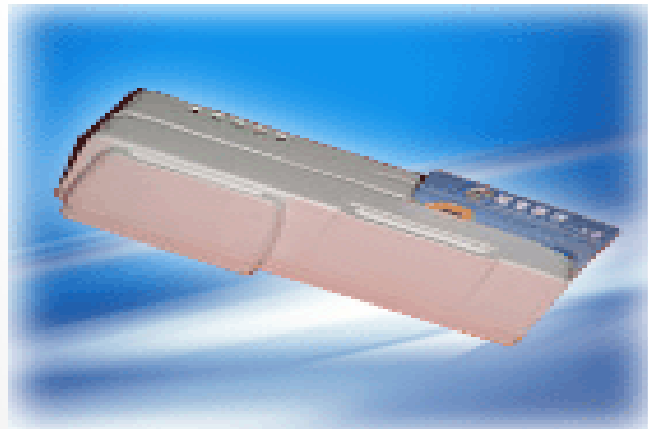

Recording density	First track- 210BPI Second track- 75BPI/210BPI Third track- 210BPI
Recording characters	First track- 76 characters Second track- 37/104 characters Third track- 104 characters.
Interface	RS232C
Baud rate	1200/2400/4800/9600
Life magnetic head	800000 passes [Conditions in a clean office room; in damp or dirty atmosphere, the life maybe 1/3 or 1/5 of the above figure]
Weight	25g